



3100 Dundee Road, Suite 707, Northbrook, IL 60062  
 1-866-527-4666 • 847-564-2260 Fax: 847-564-0495  
 www.hoto-instruments.com • E-mail: info@hoto-instruments.com  
 ISO 9001 Registered ISO/IEC 17025 Accredited

# Compact LED Stroboscope

## With Selectable Flash Duration


**Model NS-600** with strobe, 2-AA batteries and carrying case

**Model NS-601** with strobe, 4-AA rechargeable batteries, charger and carrying case.

The NS-600 LED stroboscope is designed to measure the speed of rotating or cycling linear motion objects without contact or reflective tape, as well as freeze motion visually. Aluminum housing, the latest technology, compact size and LED light make it a perfect choice for use anywhere on the factory floor. The flash duration adjusts automatically for sharper images at high speed. The NS-600 is ideal for speed, motion and vibration analysis, such as rotating shafts, fans, cams, etc.

The brightest, fully featured LED stroboscope in a compact, efficient design.


- High efficiency LED solid-state light source – never needs replacement
- Extended battery life of **8 hours** continuous use at 6,000 fpm/rpm
- Highly stable drift free operation
- Auto wide measuring range – up to 120,000 fpm/rpm
- Push button operation with x2 and ÷2 buttons for quick adjustment
- Store up to 10 flash rates in memory for records or quick retests
- Rugged aluminum housing – compact size
- Easy-to-read 5 digit 0.47" (12 mm) high LCD



## Selectable Flash Duration


For ultra high speed applications, objects may move during the brief period of a single flash, resulting in a blurred image. By decreasing flash duration, objects have less time to move and the image will appear sharper.

NS-600 automatically adjusts flash duration for ultra high speed and features selectable flash duration for sharper images at low speed.



Range	Resolution
12.0 to 9999.9 fpm/rpm	±0.1 fpm/rpm
10000 to 120000 fpm/rpm	±1 fpm/rpm (over 100,000 display flashes)

Specifications	
Selectable Units:	fpm or Hz
Accuracy:	±0.01%, ±1 LSD
Display:	12mm high, 5digit LCD
Power:	2- AA batteries
Battery Life:	8 hours (@6,000 rpm when fully charged)
Operating Temp:	0 to 45° C
Weight:	.5 lb/225 g

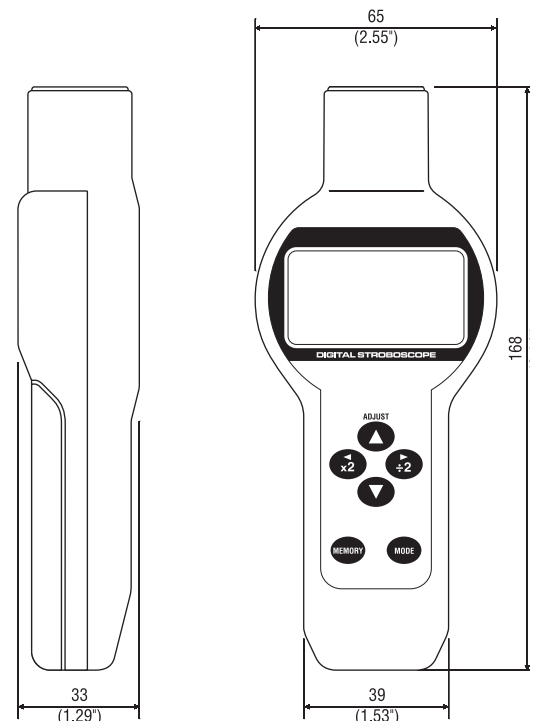

Specifications subject of change without notice.